








PLANT SCHEDULE

TREES	CODE	BOTANICAL / COMMON NAME	QTY	SIZE	COMMENTS	WUCOLS
	EXE TR	Existing Tree	-	Existing	Existing trees per approved Landscape Plan for Cedar Hill Plaza	-
	RHU LAN	Rhus lancea African Sumac	1	24" Box	Std.	L
	CHI MC	x Chitalpa tashkentensis 'Morning Cloud' Morning Cloud Chitalpa	2	24" Box	Std.	L
SHRUBS	CODE	BOTANICAL / COMMON NAME	QTY	SIZE	COMMENTS	WUCOLS
	ANI HAR	Anigozanthos x 'Harmony' Harmony Kangaroo Paw	11	5-gal.		L
	LAN DAL	Lantana camara 'Dallas Red' Dallas Red Lantana	13	5-gal.		L
	LAN NG	Lantana x 'New Gold' New Gold Lantana	12	5-gal.		L
	LEU COM	Leucophyllum frutescens 'Compacta' Compact Texas Ranger	27	5-gal.		L
	MUH DUB	Muhlenbergia dubia Pine Muhly	36	5-gal.		L
GROUND COVERS		BOTANICAL / COMMON NAME		SIZE	COMMENTS	WUCOLS
		Dymondia margaretae Dymondia		Flats	18" o.c.	L
		Lonicera japonica 'Halliana' Hall's Honeysuckle		1-gal	18" o.c.	L
		Existing Landscape			Existing planting per approved Landscape Plan for Cedar Hill Plaza	

IRRIGATION NOTES:

Landscape planting will meet MAWA water use requirements by using a low water efficient irrigation system and weather based smart controller.

Landscape planting to be irrigated the following ways:

- Trees: bubblers
- Planting areas: Drip irrigation or Hunter MP Rotators (where appropriate)



Weather based smart controller such as Hunter X-Core, or Hunter PCC will be used.

NOTES:

Total proposed landscaping shown: 1630 sq. ft.

1. Quantities shown on plant list are to be verified by Contractor.
2. Any trees planted within five feet of curbs or paving shall be installed with a root barrier per detail.

FOOTHILL BLVD.

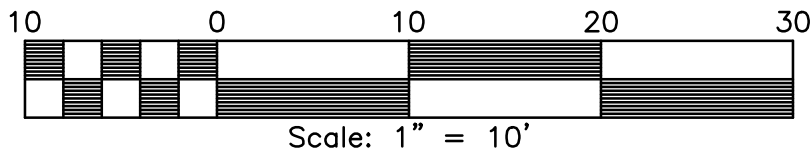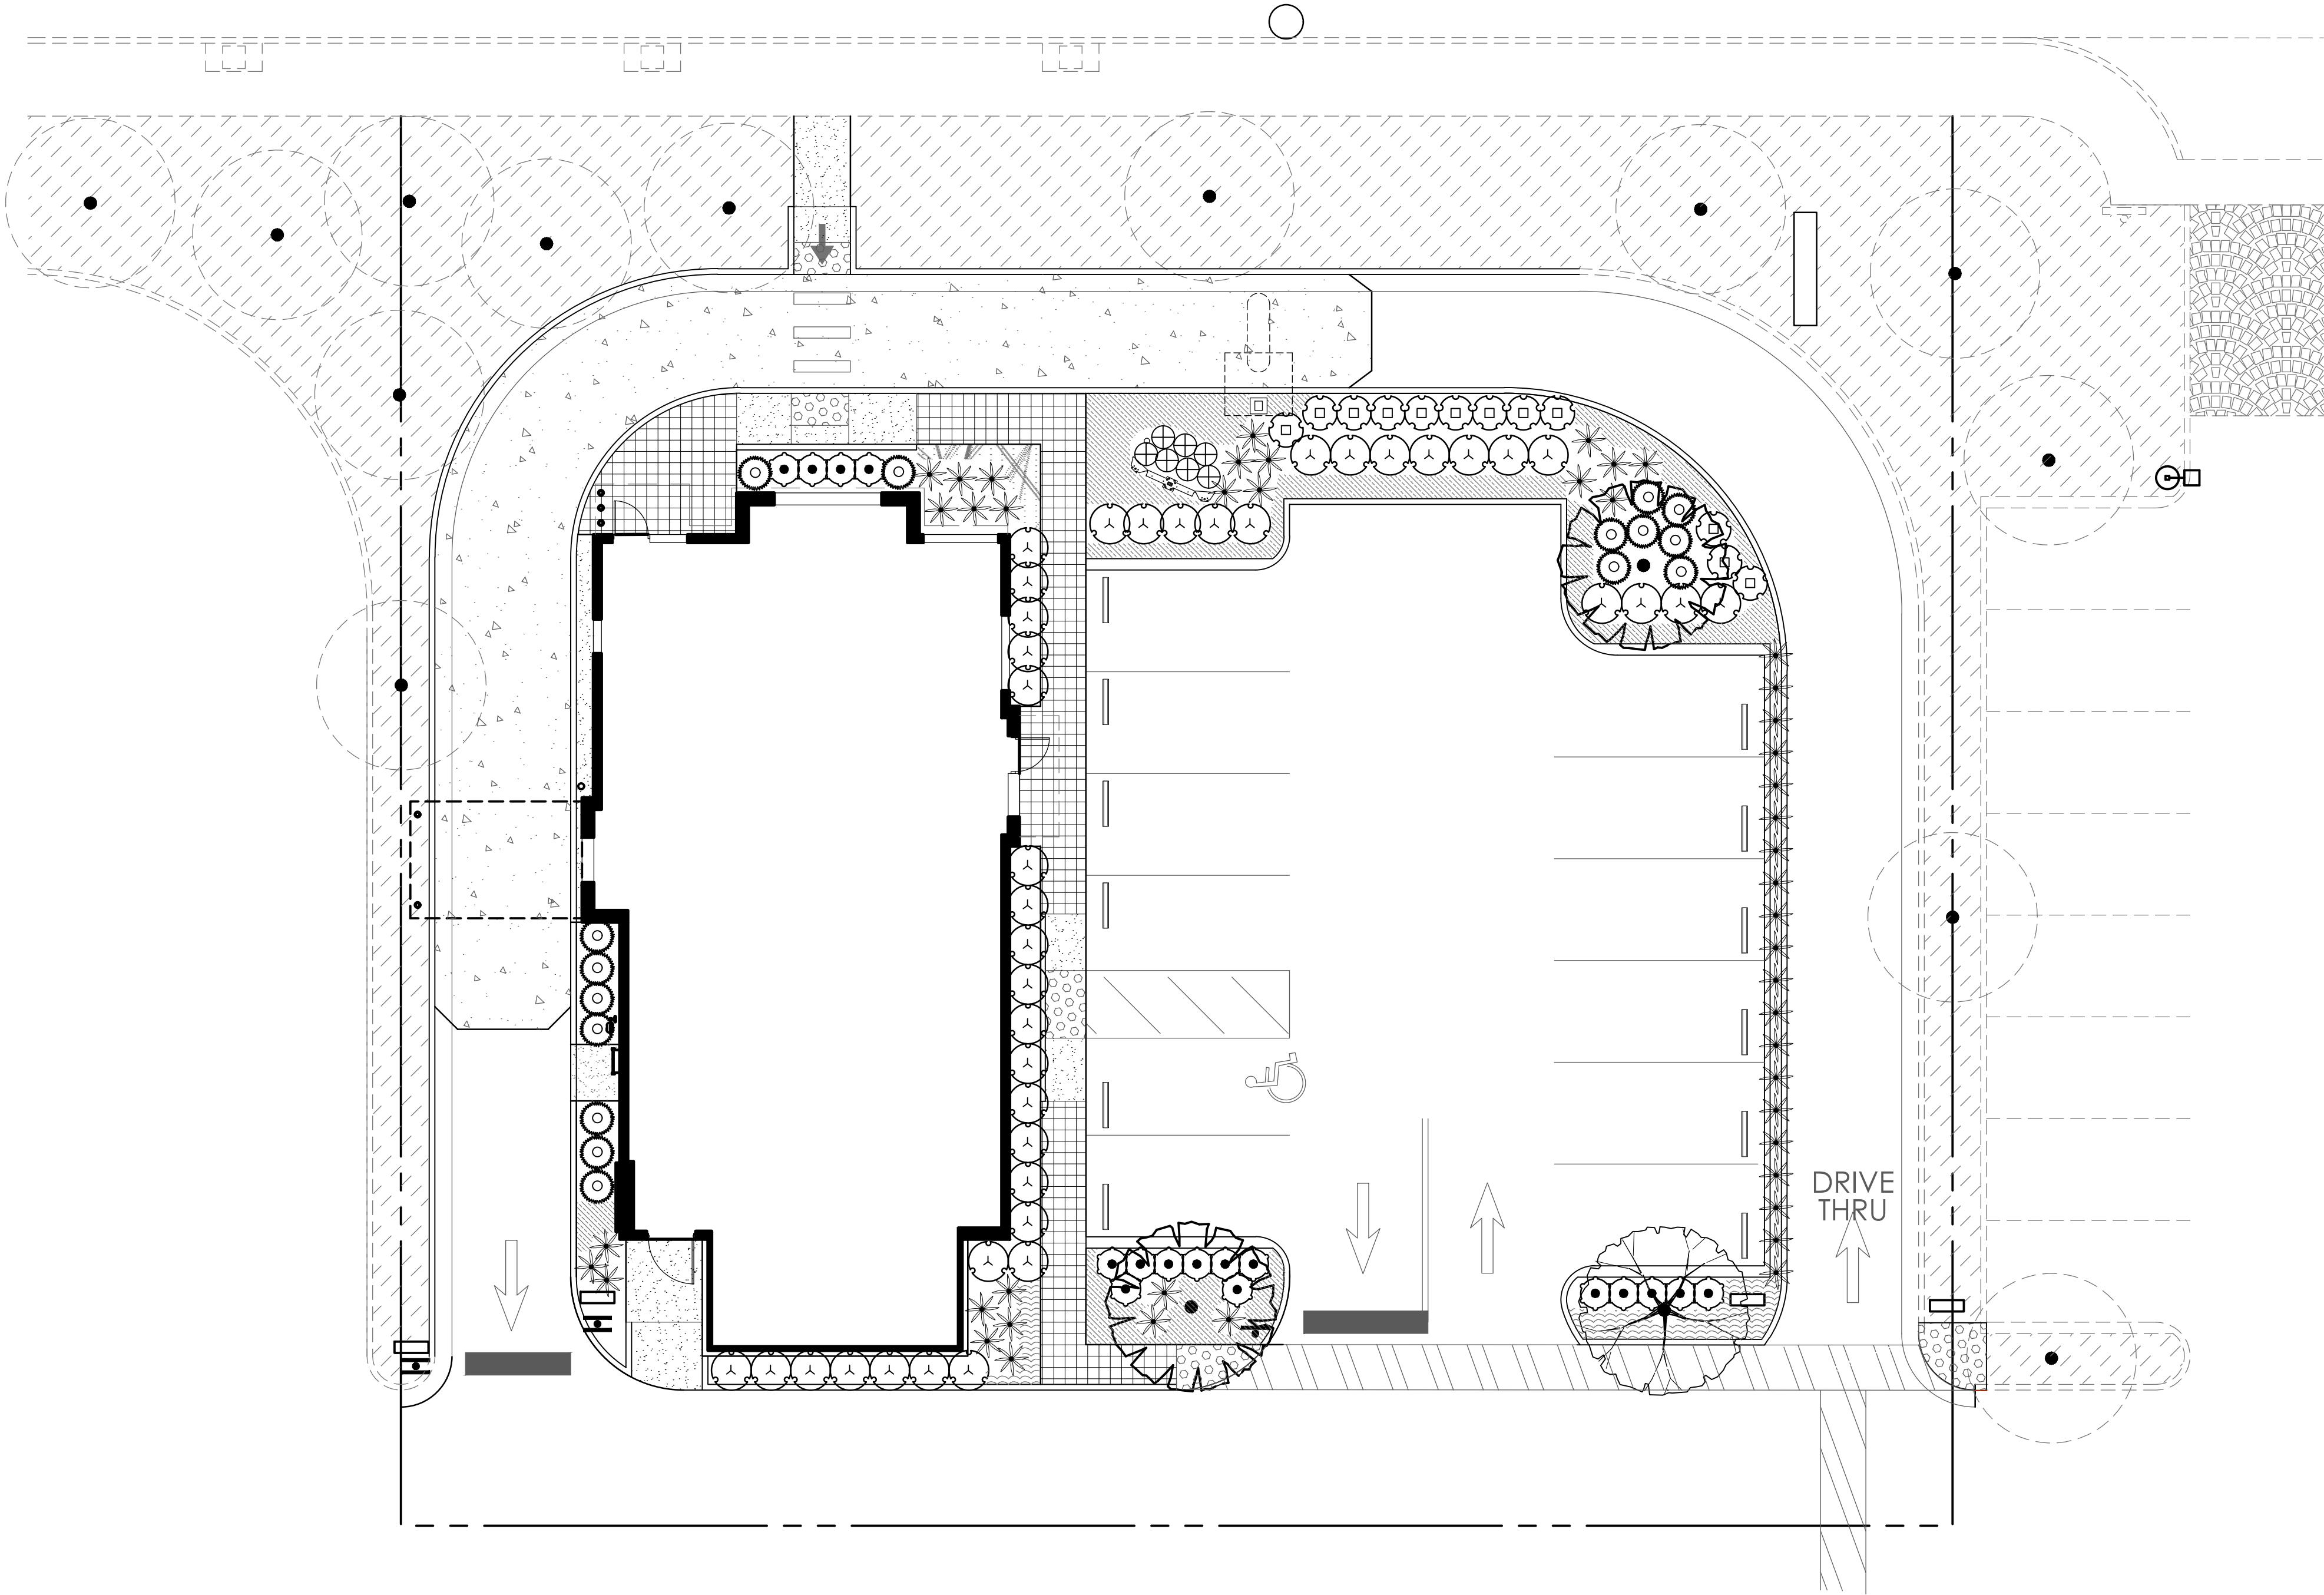

REVISIONS	BY

THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ROYAL OAK DESIGN AND SHALL BE USED ONLY FOR THE PROJECT AND SITE SPECIFICALLY IDENTIFIED HEREON. NO PART OF THESE DRAWINGS OR SPECIFICATIONS SHALL BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, WITHOUT THE WRITTEN PERMISSION OF ROYAL OAK DESIGN. ANY VIOLATION OF THIS AGREEMENT SHALL BE CONSIDERED A BREACH OF CONTRACT AND SUBJECT TO LEGAL ACTION.

ROYAL OAK DESIGN
Sylvia E. Lyons, Landscape Architect #1549
2456 Hummingbird Way
La Verne, CA 91750-2371
Telephone: (909)593-4158
Email: royaloakdesign@verizon.net

PRELIMINARY LANDSCAPE PLAN
PROJECT: ARBY'S RESTAURANT
ADDRESS: CEDAR HILL PLAZA, FOOTHILL BLVD., RIALTO



DRAWN
S.L.
DATE
7/20/2020
SCALE
1"=10'
JOB NO.
5372
SHEET

L-1